


Compuload 3000

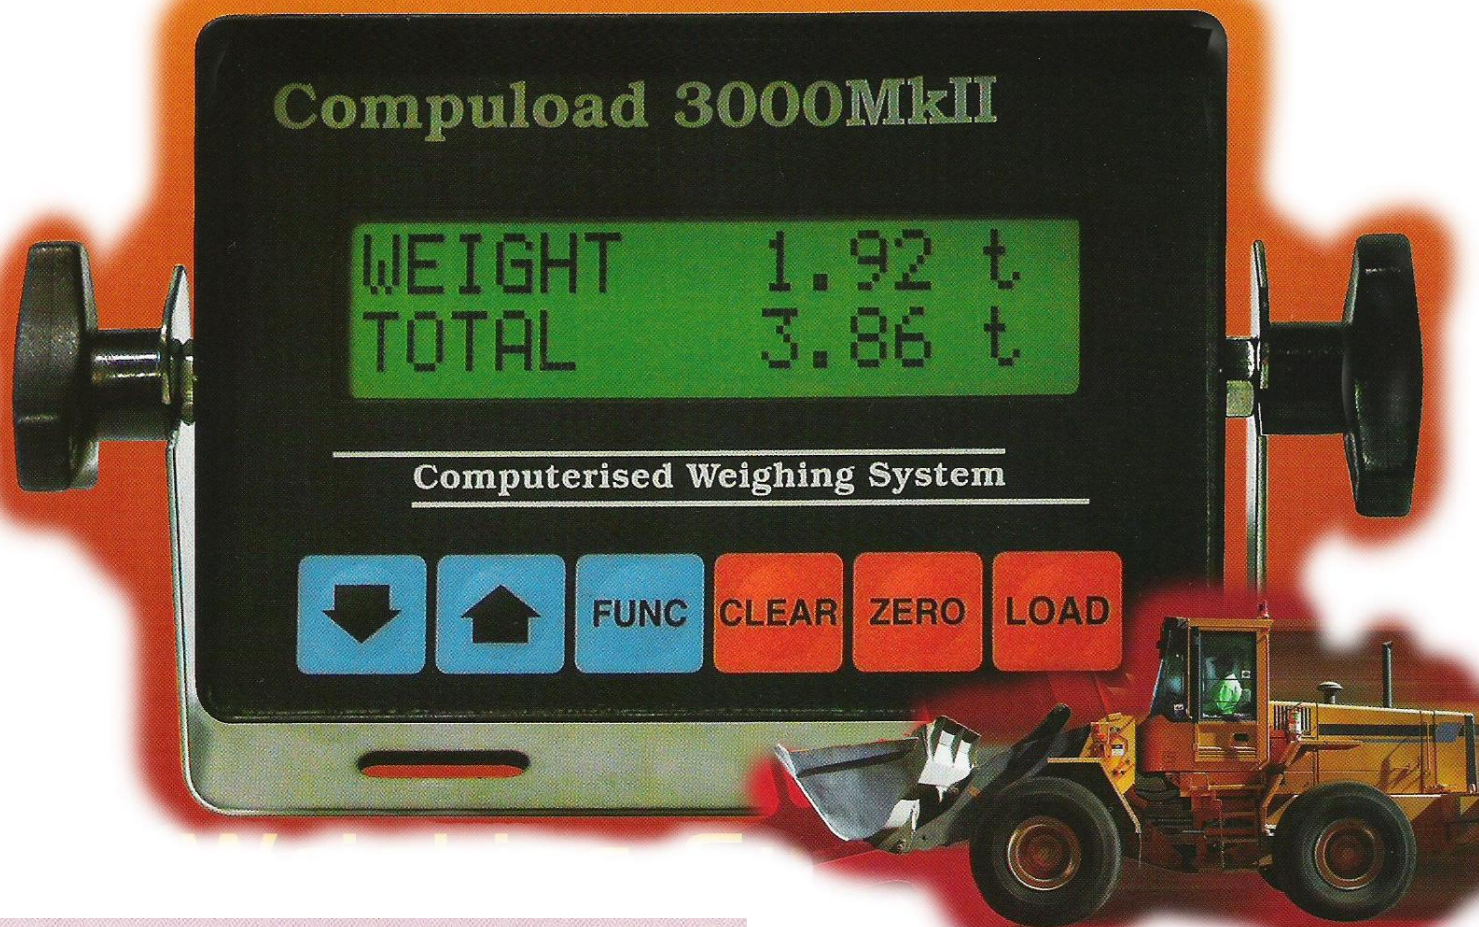

SPECIFICATIONS

Display:	2 Lines x 16 character dot matrix liquid crystal - super twist
Character Size:	9 mm high and 5 mm wide Visibility Rating 4 metres
Illumination..	Backlit LED - automatic turn-on
Keyboard:	3 x membrane user keys, 3 programmable keys
Power Supply:	12 to 24 volts DC
Supply Current:	80mA @ 12V, 40mA @ 24V (typical)
Memory:	Inbuilt non volatile memory, retains calibration and setup data without power
Input.	20 to 100mV pressure transducer
Accuracy:	+/- 1% (typical)
Mounting:	Stainless steel bracket
Dimensions..	140mm (w) x 95mm (h) x 50-80mm (d)
Enclosure:	Stainless Steel - powder coated finish
Weight:	1 kg (unpacked)
Optional Printer:	Printer model 4060, prints actual weight, total and grand total weight, company name & phone number together with Date & Time

The Compuload 3000 MkII is Fully electronic. Lift Speed Compensation allows weighing to take place as the load is lifted and can be done in kgs, lbs, tonnes or other units. The Compuload 3000 MkII has compact design and other features such as Programmable Tare Reduction, Digital Filtering, adjustable decimal point and is 12 to 24 volt compatible. The RS 232 Serial Output allows for printouts of every weighing.