

Floating Vendor

The floating vendor allows users to operate up to 10 scales per customer, feeding captured data back to one central location.




Efficient Consumer Response (ECR)

The RS delivers professional ECR management via its price look up (PLU) function which includes 1000 PLU for 20 groups and the possibility to set 60 preset PLU on 30 keys.



Customisable Receipt Design

The RS can produce customised receipt designs with logos, up to 50 extra texts with 200 characters, greeting messages and vendor names.



Ethernet Connection

The RS supports communication with PCs, cash registers, and scanners while Ethernet port connections make software updates quick and easy.



With its compact design and integrated printer the RS can operate as a scale, electronic cash register, printer and ECR management tool, eliminating the need for multiple systems and saving counter space.

Addtional features include:

Mobile Business Through Battery Support

- the RS can be run via rechargeable battery with a long-lasting operation time.

Stainless Steel Construction - the large, robust and water resistant stainless steel weighing plate of the RS provides consistent hygienic weighing.


OHAUS RS Series Standard Receipt Printing Retail Scale

| General Specifications | | | |
|------------------------|--|--|--|
| Application Modes | Data entry, ticket setting, data deletion, operational setting, service mode, report printing, com- munication, password management | | |
| Features | Direct price entry, user friendly PLU editing and price changes, PLU library, automatic and manual tare settings, discount promotions by hour and date, 8 active vendors, reporting, networking with floating vendor, Ethernet connectivity, PC software, 3 safety password settings | | |

Specifications

| Model | RS 6S | RS 15S | RS 30S | |
|--|---|--------------|--------------|--|
| Capacity | 6kg x 2g | 15kg x 5g | 30kg x 10g | |
| Construction | Removable stainless steel pan, high grade polymer housing | | | |
| LCD with backlight; customer and user display Weight display: 6 digits Display Price per kg display: 6 digits Price to pay display: 7 digits 12 alphanumeric characters | | | | |
| Display Indicators | Tare, Battery Status, PLU, Fix Price, Network Status, Large Sale | | | |
| Keyboard | 50 keys with 30 preset keys and the possibility to preset 60 PLU | | | |
| Net Weight | t Weight 6.1kg | | | |
| Operating Temperature | | -10° to 40°C | -10° to 40°C | |
| Pan Size | 350mm x 228mm | | | |
| PLU Quantity | 1000 | | | |
| Power | 100 -240V, 50Hz Internal rechargeable sealed lead acid battery | | | |
| Scale Dimensions | 350mm x 369.5mm x 147mm without tower 350mm x 369.5mm x 438mm with adaptable tower | | | |
| Communication | Ethernet, RJ11, RS232 | | | |

Outline Dimensions

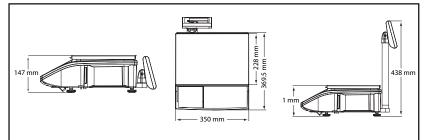

Accessories Cash drawer Cross cable CAT FTP 5m Rechargeable battery Barcode reader Receipt Rolls www.ohaus.com * ISO 9001:2000

© Copyright Ohaus Corporation

80774435



Registered Quality Management System