



OHAUS RU Series

Advanced Label Printing Retail Scale



Large memory

The large memory of the RU can store up to 4000 price look ups (PLUs) making it suitable for larger business operations.



16-Alphanumeric Character Display

The RU includes a 16-alphanumeric character display for clear and fast readings in any environment.




Customisable Label Design

The RU can be set to print essential information such as sell-by and use-by dates, ingredients, place of origin and nutritional information.

The rugged RU is the ultimate solution for retail weighing requirements, offering advanced label printing coupled with multiple functions, including prepacking and training.

Additional features include:



Ethernet Connection

The RU supports communication with PCs, cash registers, and scanners while Ethernet port connections make software updates quick and easy.

Multiple Display Indicators - the RU's adjustable backlight display includes multiple indicators including tare, battery status, PLU, fix price, 100g facility, network status and large sales.

Stainless Steel Construction - the large, robust and water resistant stainless steel weighing plate of the RU provides consistent hygienic weighing.

OHAUS RU Series Advanced Label Printing Retail Scale


General Specifications

| | |
|-------------------|---|
| Application Modes | Weighing and price computing, receipt and label printing, prepackaging, cash register function, training function (available with relevant license) data entry, ticket setting, data deletion, operational setting, service mode, report printing, communication, password management |
| Features | Direct price entry, user friendly PLU editing and price changes, PLU library, automatic and manual tare settings, discount promotions by hour and date, ticket printing, reporting, Ethernet connectivity, PC software, 3 safety password settings |


Specifications

| Model | RU-U2-A15D | RU-C2-A06D | RU-C2-A15D | RU-C2-A30S |
|-----------------------|---|--|---------------|------------|
| Capacity | 6/15kg x 2/5g | 3/6kg x 1/2g | 6/15kg x 2/5g | 30kg x 5g |
| Construction | Heavy-duty aluminium baseplate, stainless steel pan with rounded edges, high grade polymer surfaces and sealed components | | | |
| Display | Adjustable backlit LCD customer and user display Weight display: 5 digits Tare display: 5 digit Price per kg display: 7 digits Price to pay display: 7 digits 16 alphanumeric characters | | | |
| Display Indicators | Tare, PLU, fix price, 100g facility, network status, large sale | | | |
| Keyboard | 99 keys, 30 function keys, 69 freely programmable fixed keys | 58 keys, 28 function keys, 28 freely programmable fixed keys | | |
| Net Weight | 10.6 kg | | | |
| Operating Temperature | -10°C to +40°C | | | |
| Pan Size | 390mm x 260mm | | | |
| PLU Quantity | 4000 | | | |
| Power | 220V internal power supply | | | |
| Scale Dimensions | 390mm x 493mm x 531mm without tower 390mm x 493mm x 292mm with adaptable tower | | | |
| Communications | Ethernet, RJ11, RS232 | | | |

Outline Dimensions – RU C2

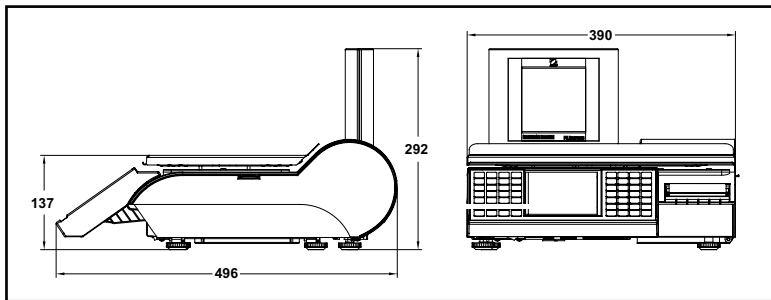

Outline Dimensions – RU T2

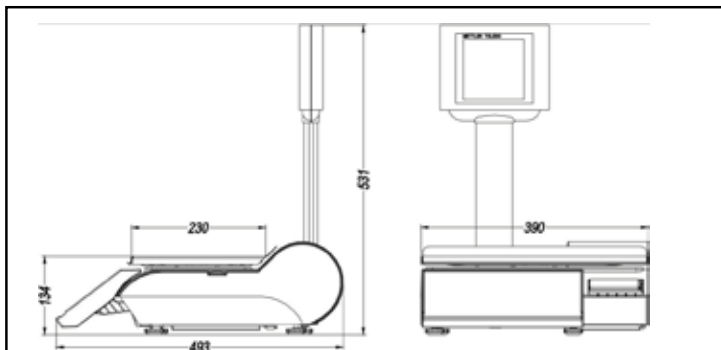

Document is subject to technical changes

www.ohaus.com

* ISO 9001:2008
Registered Quality Management System

80774529 © Copyright Ohaus Corporation

